

# ASAP FASTENING SYSTEMS, INC.

SUPPLIES FOR INDUSTRY AND CONSTRUCTION

2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215


(414) 344-4500 • FAX (414) 344-4504

WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

## Dimensional Data


### BUGLE HEAD

Drywall Screws  
Deck Screws  
Particle Board Screws

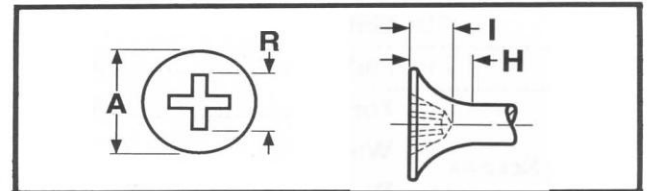

Size	A		H		R		I	
	Head Diam.		Head Hgt.		Recess Diam.		Recess Depth	
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
6	.347	.315	.031	.020	.189	.176	.110	.087
7	.355	.322	.035	.020	.206	.191	.125	.102
8	.363	.330	.039	.020	.214	.201	.135	.112
10	.379	.344	.045	.034	.222	.208	.142	.137

### FLAT HEAD TORX DRIVE (Floorboard)

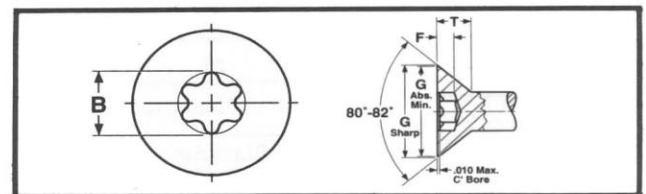

Screw Size	G		T	B	F	(Fallaway) Max. Penetration Of No-Go Gage	Drive Size
	Head Dimensions		Ref.	Ref.	Gauge Penetration Min.		
	Max. Sharp	Abs. Min.					
1/4 (.250)	.507	.452	.153	.221	.060	.030	T30
5/16 (.312)	.635	.566	.191	.266	.087	.030	T40