

ASAP FASTENING SYSTEMS, INC.


Supplies for industry and construction

2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

PUNCHING SHEAR RESISTOR STUDS (Type PSR Stud)

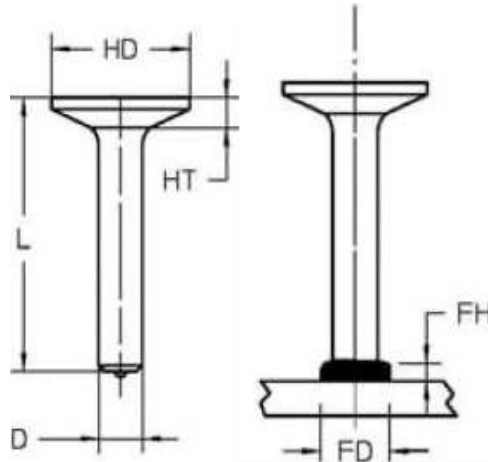

DESCRIPTION

Headed Concrete Anchor - Full Weld Base / Type F Ferrule supplied

Stud Diameter	Length	TW Part Number (New)	Head Diameter	Head Height	Weld Fillet Diameter	Weld Fillet Height	Ferrule
3/8 (9.5mm)	3-7/16	PSR06-055-11	1.19 (30.1mm)	.26 (5.3mm)	1/2	1/8	FER06-F (9000-06-F)
1/2 (12.7mm)	2-5/8	PSR08-042-11	1.58 (40.2mm)	.33 (7.1mm)	11/16	5/32	FER08-F (9000-08-F)
5/8 (15.9mm)	3-3/4	PSR10-060-11	1.98 (50.2mm)	.40 (8.9mm)	7/8	3/16	FER10-F (9000-08-F)
3/4 (19.1mm)	4-3/8	PSR12-070-11	2.37 (60.2mm)	.47 (10.7mm)	1-1/16	1/4	FER12-F (9000-012-F)

Notes:

1. Weld Studs listed in the table above are the Standard Minimum length.
2. Tru Weld Studs are available in any required length above the standard minimum
3. Listed Ferrule is for standard flat down hand position

Material	Low Carbon Steel (ASTM A29)
Stud Diameter	3/8" thru 3/4"
Stud Standard Length	Can be made in any length above the standard minimum
Min. Tensile Strength Type B (psi)	65,000
Min. Yield Strength (.02% offset) - Type B (psi)	51,000
Elongation (% in 2 in.)	20% Min.
Elongation (% in 5x dia.)	15% Min.
Reduction of Area	50% Min.