


ASAP FASTENING SYSTEMS, INC.

SUPPLIES FOR INDUSTRY AND CONSTRUCTION


2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

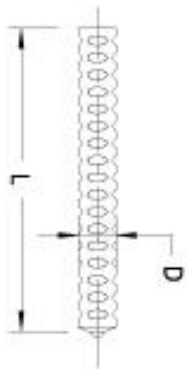

BEFORE WELD

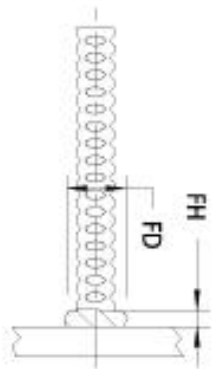

AFTER WELD

TYPE **DB** STUD
(DEFORMED BAR ANCHOR)
NO THREAD - FULL WELD BASE
TYPE **F** FERRULE SUPPLIED

(NOTE #3)

| D | | L ^{*1} | STUD PART NUMBER ^{*2} | FD | FH | CHUCK PART NUMBER | LIGHT DUTY SPLIT | | STANDARD COMBINATION ^{*4} |
|----------|--|-------------------------|--------------------------------|----------------------|--------------------|-------------------|------------------|------------------|------------------------------------|
| DIAMETER | | MIN. LENGTH BEFORE WELD | | WELD FILLET DIAMETER | WELD FILLET HEIGHT | | FOOT PART NUMBER | GRIP PART NUMBER | FOOT AND GRIP |
| 3/8 | | 10-1/8 | 1211-06-162 | 1/2 | 1/8 | 5019 | 11124 | 8052 | 8125 |
| 1/2 | | 12-1/8 | 1211-08-194 | 11/16 | 5/32 | 8027 | 11125 | 8053 | 8125 |
| 5/8 | | 12-3/16 | 1211-10-195 | 7/8 | 3/16 | 8028 | 11125 | 8054 | 8127 |
| 3/4 | | 12-3/16 | 1211-12-195 | 1-1/16 | 1/4 | 8029 | 11125 | 8054 | 8127 |

1.)  STUDS ARE AVAILABLE IN ANY REQUIRED LENGTH ABOVE THE STANDARD MINIMUM UP TO 48".

2.) SEE PART NUMBER CONSTRUCTION DATA ON PAGE NO.3

3.) LISTED FERRULE IS FOR STANDARD FLAT DOWN HAND POSITION. SEE PAGE NO.5 FOR LISTING OF FERRULES USED IN OTHER APPLICATIONS.

4.) REQUIRES USE OF P/N-11101 DUAL LEG ADAPTOR.