

ASAP FASTENING SYSTEMS, INC.


SUPPLIES FOR INDUSTRY AND CONSTRUCTION

2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

BENT ANCHOR BOLTS

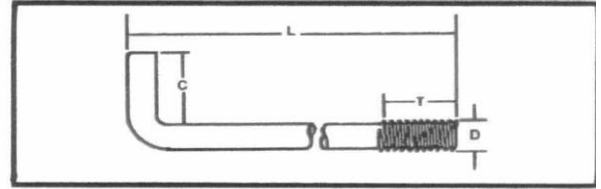

RIGHT ANGLE BENT
(DxLxCxT)

National Coarse - Rolled Thread

Dia.	Length	Hook	Thread	Weight
3/8	6	1	1 1/2	18.07
3/8	8	1	1 1/2	22.89
3/8	10	1	1 1/2	27.71
3/8	12	1	1 1/2	32.53
1/2	6	1	2	32.57
1/2	8	1	2	41.41
1/2	12	1	2	59.07
1/2	18	1	1 1/2	85.57
1/2	24	1	1 1/2	113.0
5/8	8	2	3	69.17
5/8	12	2	4	96.84
5/8	15	2	4	124.0
5/8	18	2	4	138.3
5/8	24	2	4	179.6

Hot-Rolled Low Carbon Steel

Dia.	Length	Hook	Thread	Weight
3/4	8	3	4	115
3/4	12	3	4	156
3/4	15	3	4	187
3/4	18	3	4	218
3/4	24	3	4	282
7/8	12	3	5	206
7/8	15	3	5	221
7/8	18	3	5	289
7/8	24	3	5	371
1	12	3	5	2.81
1	18	3	5	3.94
1	24	3	5	5.06
1	36	3	5	7.31
1 1/4	18	4	6	6.35
1 1/4	24	4	6	8.27
1 1/4	36	4	6	11.17