

ASAP FASTENING SYSTEMS, INC.

SUPPLIES FOR INDUSTRY AND CONSTRUCTION

2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504


WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM



MODEL

HA07-1624

HA07-1624

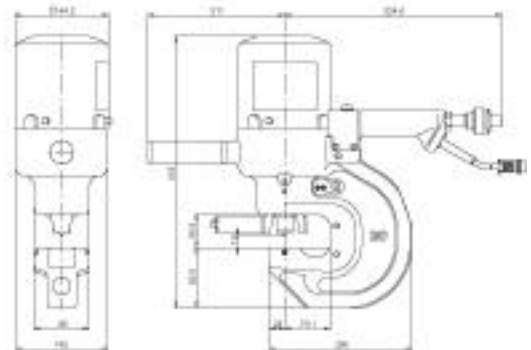

Specifications

Model		HA07-1624	
Max. Throat Depth	inch (mm)	2-3/4" (70)	
Punching Capacity (for Mild Steel)	Max. Punching Diameter	inch (mm)	15/16" (24)
	Max. Punching Thickness	inch (mm)	5/8" (16)
Hole Making Time	sec	Punching Time 16.5	
Allowable Max. pressure	psi (kg/cm ²)	10,000 psi (700)	
Max. Output	bf (tf)	97.020 (48)	
Ram Stroke	inch (mm)	1" (25)	
Mass (Weight)	lbs (kg)	63 (28.5)	

Standard Accessories for HA07-1624

- Hose cord assembly
- 22 mm "D" series punch & die
- Sub handle assembly
- Spinner wrench
- 4 mm Allen wrench
- Tool box