


ASAP FASTENING SYSTEMS, INC.

SUPPLIES FOR INDUSTRY AND CONSTRUCTION


2013 SOUTH 37TH STREET • MILWAUKEE, WISCONSIN 53215

(414) 344-4500 • FAX (414) 344-4504

WWW.ASAPFASTENING.COM • EMAIL: SALES@ASAPFASTENING.COM

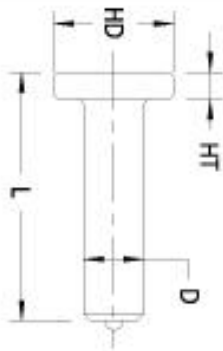

BEFORE WELD



AFTER WELD

TYPE **DSC** STUD
SHEAR CONNECTOR - FULL WELD BASE
TYPE **TD** FERRULE SUPPLIED
(FOR THRU-DECK WELDING)

(NOTE #3)

							LIGHT DUTY SPLIT		STANDARD COMBINATION ^{*4}	
D DIAMETER	L ^{*1} MIN. LENGTH BEFORE WELD	STUD PART NUMBER ^{*2}	HD HEAD DIAMETER	HT HEAD HEIGHT MIN.	FD WELD FILLET DIAMETER	FH WELD FILLET HEIGHT	CHUCK PART NUMBER	FOOT PART NUMBER	GRIP PART NUMBER	FOOT AND GRIP
3/4	3-3/8	2311-12-054	1-1/4	3/8	1-1/4	1/4	8038	11126	8055	11116
3/4	3-7/8	2311-12-062	1-1/4	3/8	1-1/4	1/4	8038	11126	8055	11116
3/4	4-3/8	2311-12-070	1-1/4	3/8	1-1/4	1/4	8038	11126	8055	11116
3/4	4-7/8	2311-12-078	1-1/4	3/8	1-1/4	1/4	8038	11126	8055	11116
3/4	5-3/8	2311-12-086	1-1/4	3/8	1-1/4	1/4	8038	11126	8055	11116
3/4	5-7/8	2311-12-094	1-1/4	3/8	1-1/4	1/4	8038	11126	8055	11116

1. STUDS ARE AVAILABLE IN ANY REQUIRED LENGTH ABOVE THE STANDARD MINIMUM.

2. SEE PART NUMBER CONSTRUCTION DATA ON PAGE NO.3

3. LISTED FERRULE IS FOR STANDARD FLAT DOWN HAND POSITION. SEE PAGE NO.5 FOR LISTING OF FERRULES USED IN OTHER APPLICATIONS.